


REVISIONS			
REV	DESCRIPTION	DATE	BY
0			

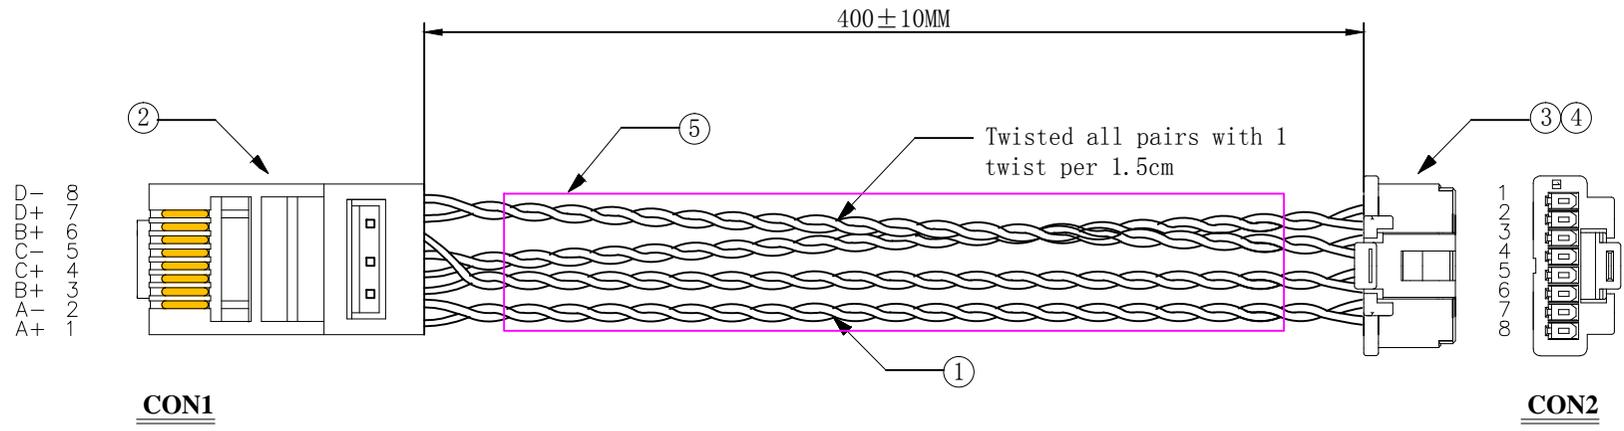

D- 8  
D+ 7  
B+ 6  
C- 5  
C+ 4  
B- 3  
A- 2  
A+ 1

1  
2  
3  
4  
5  
6  
7  
8

CONNECTIONS		
CON1	COLOUR	CON2
5	GRAY	1
4	BROWN	2
7	PINK	3
8	BLUE	4
3	YELLOW	5
6	GREEN	6
1	ORANGE	7
2	RED	8

ITEM	NAME	PART No.	DESCRIPTION	QTY
5	TUBE	409-0005-05	HEATSHRINK TUBE	1
4	CONN	403-0001-01	MOLEX 5013340000 OR EQUAL	8
3	CONN	403-0001-08	MOLEX 5013300800 OR EQUAL	1
2	CONN	402-0800-01	RJ45-8P8C	1
1	WIRE	101-1061-28	UL1061 28AWG	8

<small>PROPRIETARY INFORMATION: ENERCON RESERVES ALL RIGHTS AND NO PORTIONS OF THIS DOCUMENT CAN BE COPIED OR IN WHOLE WITHOUT SPECIFIED PERMISSION FROM ENERCON TECHNOLOGIES.</small>		THIRD ANGLE PROJECTION 		<b>BotBlox</b>	
DIMENSIONS ARE MILLIMETRE TOLERANCE UNLESS OTHERWISE SPECIFIED LENGTH TOLERANCE 0mm - 500mm ±5 500mm - 1000mm ±15 1000mm - 2000mm ±25 5000mm - PLUS ±50		DRAWING NAME <b>10120188D009</b>		DRAWING NO. <b>C-26766</b>	
MATERIAL SEE MATERIAL LIST FINISH NA		APPROVALS ENGINEER: LEECO 07/19/2023 REVIEWER:		SHEET 1 OF 1 SHEET SIZE C SCALE 1:1 REV 0 ECR # 28463	
			DO NOT SCALE DRAWING		

NOTES:  
 (1) THE PRODUCT NEEDS 100% SHORT CIRCUIT, OPEN CIRCUIT AND DISLOCATION TEST  
 (2) CONDUCTION IMPEDANCE: 5 OHM MAX  
 (3) INSULATION IMPEDANCE: 10M Ω MIN/DC 300V/10MS