


REVISIONS			
REV	DESCRIPTION	DATE	BY
0			

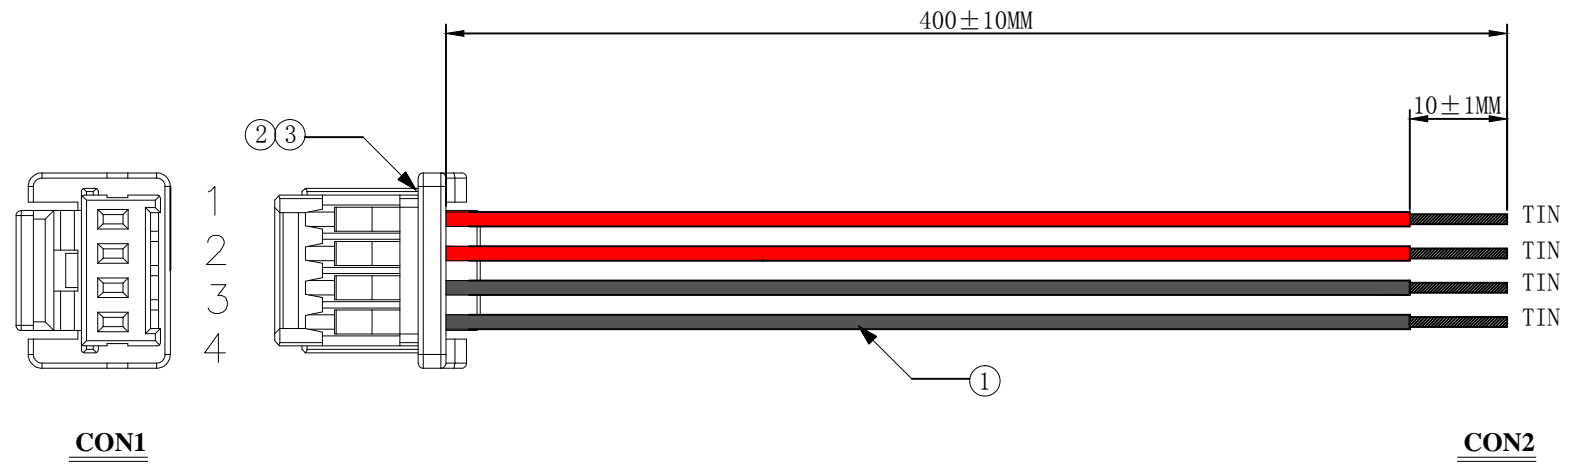

CONNECTIONS		
CON1	COLOUR	CON2
1	RED	TIN
2	RED	TIN
3	BLACK	TIN
4	BLACK	TIN

NOTES:
 (1) THE PRODUCT NEEDS 100% SHORT CIRCUIT, OPEN CIRCUIT AND DISLOCATION TEST
 (2) CONDUCTION IMPEDANCE: 5 OHM MAX
 (3) INSULATION IMPEDANCE: 10M Ω MIN/DC 300V/10MS

ITEM	NAME	PART No.	DESCRIPTION	QTY
3	CONN	403-0001-01	MOLEX 5013340000 OR EQUAL	4
2	CONN	403-0001-04	MOLEX 5019390400 OR EQUAL	1
1	WIRE	101-1061-28	UL1061 28AWG	4

<small>PROPRIETARY INFORMATION: ENERCON RESERVES ALL RIGHTS AND NO PORTIONS OF THIS DOCUMENT CAN BE COPIED IN PART OR IN WHOLE WITHOUT SPECIFIED PERMISSION FROM ENERCON TECHNOLOGIES.</small>		THIRD ANGLE PROJECTION 		BotBlox	
DIMENSIONS ARE MILLIMETRE TOLERANCE UNLESS OTHERWISE SPECIFIED LENGTH TOLERANCE 0mm - 500mm ±5 500mm - 1000mm ±15 1000mm - 2000mm ±25 5000mm - PLUS ±50		DRAWING NAME BB-PCTL1-4-0.4		DRAWING NO. C-26767	
APPROVALS ENGINEER: LEECO REVIEWER:		DATE 07/19/2023		SHEET 1 OF 1 SHEET SIZE C SCALE 1:1	
MATERIAL SEE MATERIAL LIST FINISH NA		DO NOT SCALE DRAWING		REV 0 ECR # 28464	